

Distributor for Crystal Fountains

Custom Fountains, Inc.

1-800-563-5628 - 513-398-1447 - Fax 513-398-5141






Spray Ring

NSR series

Function

A circular pattern of individual sprays with an outstanding visual effect. The spray appears lacy by day and sparkles when illuminated by night. Adjustable nozzles permit infall, straight or outfall pattern. **Not water level dependent.**

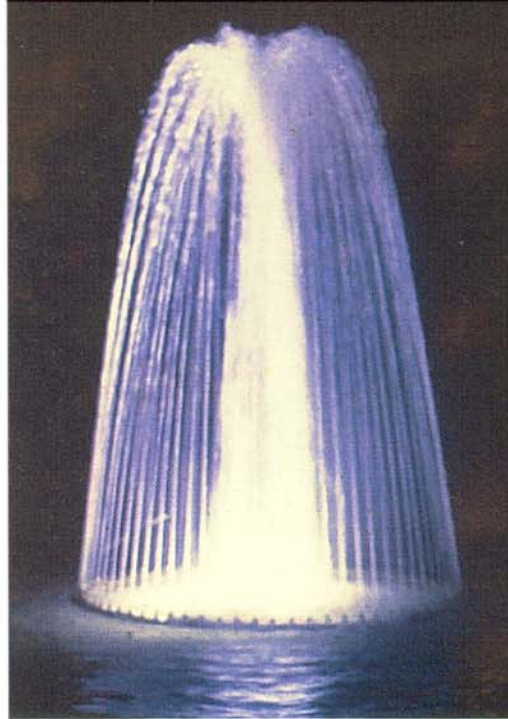

Specification:

Construction shall be extruded PVC with individually adjustable DEFO brass nozzles with inlet fittings, plugs and leg connections as required.

Options:

(Add suffix)
 B - red brass ring
 F - reinforced fibreglass wrapped PVC ring

Note:

- (for optimum effect)
1. Requires fine screening at pump (see performance chart).
 2. Custom DEFO rings and bars (all shapes and sizes) available on request.
 3. Use shaded chart section.

Dimensions

Performance

DEFO no.	suction strainer openings required	dia.	inlet (npt) (bsp)	no. inlet	no. jets	pipe dia.	spray height	2'	3'	4'	5'	6'	8'	10'	12'	14'
							head	6'	8'	10'	12'	15'	20'	25'	30'	35'

Nozzle opening = 0.125"

NSR-122	.09375"	1"	1"	1	16	1"	gpm	7	8	10							
NSR-222	.09375"	2"	1"	2	22	1 1/4"	gpm	9	11	13							
NSR-322	.09375"	3"	1 1/4"	2	47	1 1/4"	gpm	19	24	28	33	38					
NSR-422	.09375"	4"	1 1/4"	2	59	1 1/2"	gpm	20	25	30	35	40					
NSR-522	.09375"	5"	1 1/4"	2	56	1 1/2"	gpm	23	28	34	40	45	56				
NSR-622	.09375"	6"	1 1/4"	3	75	2"	gpm	30	38	45	53	60	75				
NSR-822	.09375"	8"	1 1/4"	4	113	2"	gpm	45	57	68	79	90	113	125			

Nozzle opening = 0.187"

NSR-223	14025"	2"	1 1/4"	1	24	2"	gpm	25	35	48	52	55					
NSR-323	14025"	3"	1 1/4"	2	36	2"	gpm	30	50	72	78	86					
NSR-423	14025"	4"	1 1/4"	2	48	2"	gpm	45	70	96	106	120					
NSR-523	14025"	5"	1 1/4"	2	60	2"	gpm	53	84	114	122	130	146				
NSR-623	14025"	6"	1 1/4"	3	72	2"	gpm	60	96	132	144	162	174				
NSR-823	14025"	8"	1 1/4"	4	84	2 1/2"	gpm	80	124	168	184	200	226	244	260	278	

4300 State Route 42 - Mason - Ohio - 45040