

Distributor for Crystal Fountains

Custom Fountains, Inc.

1-800-563-5628 - 513-398-1447 - Fax 513-398-5141




Bursting Jet

NBU series

Function

A fascinating showpiece, the Bursting Jet with its effervescent splashing provides continued interest for the viewer. This jet is best suited for an open area, in a pool with a diameter at least four times the operating height of the jet. **Not water level dependent.**

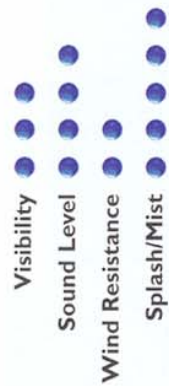

Specification:



Construction shall be cast bronze, machined brass and copper with DEFO integral burst ratio adjustment screw.

Options:

(Add suffix)
 Q - chrome plated
 S - DEFO swivel connection
 (see ASL/ASU series)

Note:

- (for optimum effect)
1. Dimension 'W' (nozzle projection above water level) must be maintained.
 2. Requires fine screening at pump (see performance chart).
 3. Requires non-turbulent water supply. Allow 12" (300 mm) straight pipe under jet.
 4. Use shaded chart section.

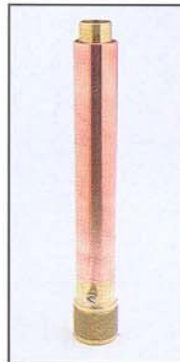

Dimensions

Performance

DEFO no.	suction strainer openings required	a dim.	b dim.	w dim.	inlet (npt) (bsp)	spray height	4'	5'	6'	8'	10'
NBU-050	.063"	5"	3/4"	1 1/4"	1/2"	gpm head spread	3 7' 16"	5 10' 16"			
NBU-075	.063"	8"	1 1/4"	2"	3/4"	gpm head spread		8 11' 20"	11 12' 28"		
NBU-100	.063"	11"	1 1/4"	3 1/2"	1"	gpm head spread		13 8' 40"	15 9' 40"	17 11' 54"	18 13' 70"

4300 State Route 42 - Mason - Ohio - 45040