

Distributor for Crystal Fountains

Custom Fountains, Inc.

1-800-563-5628 - 513-398-1447 - Fax 513-398-5141



Rain Curtain

NRC series

Function

A spectacular effect of water droplets falling from great heights in slow motion, quietly and without splash.

Laces may be installed up to 20° from vertical without compromising the effectiveness of the rain curtain. Curtain can take many forms. Dazzling when illuminated.



Specifications:

NRC-100, NRC-101

Curtain laces shall be clear Mylar, 0.250" (6 mm) x length to suit. NRC-100 spool length is 100' (30m). NRC-101 spool length is 600' (200m). Specify when ordering.

NRC-200

DEFO nozzle assembly shall be hexagonal brass, 0.50" (12 mm) x 2" (50 mm) with brass lock ring, washer, locknut and neoprene gasket.

NRC-300


Splash suppressor shall be clear plastic, 0.33" (7 mm) x 2" (50 mm).

NRC-400

DEFO curtain weights shall be lead, 3/4 lbs (450 gm).

Note:

- (for optimum effect)
1. Each nozzle requires 6 gph (0.1 lpm) at a 0.75" (20 mm) water depth at nozzle.
 2. Nozzle spacing should be 1.125" (32 mm) minimum.
 3. Utilize only filtered and softened water to prevent clogging and discolouring of lace.
 4. Contact the factory for design and installation recommendations.

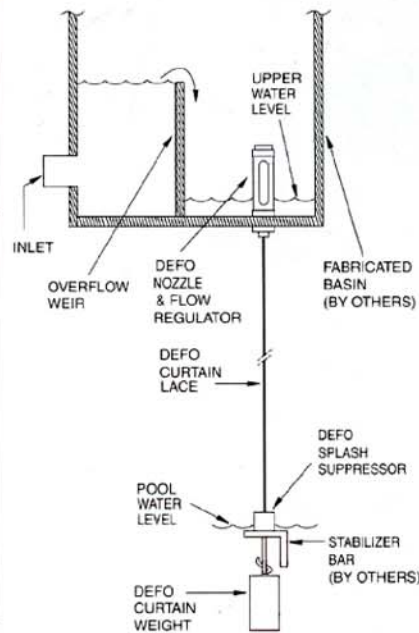

4300 State Route 42 - Mason - Ohio - 45040